


## Electric Left Hinge Extruded Aluminum Casing Frame

Sweep Bottom 3 Sided Return Jamb & Backup Casings

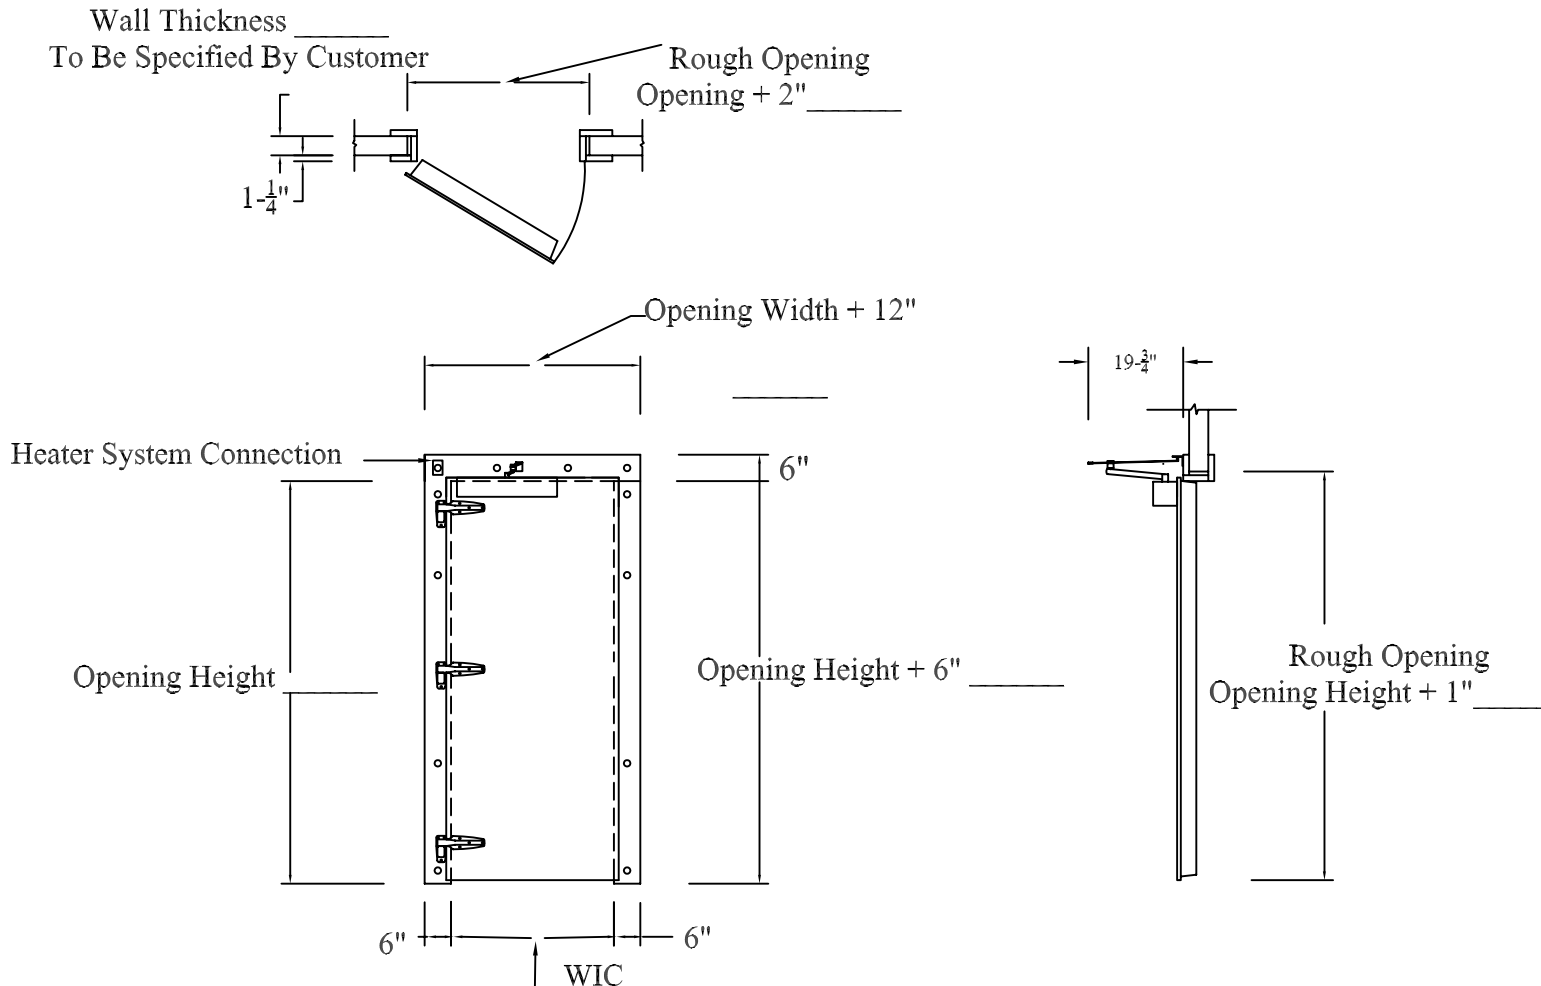

**ROUGH OPENING:** Width \_\_\_\_\_ Height \_\_\_\_\_

**NET OPENING:** Width \_\_\_\_\_ Height \_\_\_\_\_

**FEATURES:**

Cooler \_\_\_\_\_ Freezer \_\_\_\_\_ \*\*

Temperature:

Interior \_\_\_\_\_ °F

Exterior \_\_\_\_\_ °F

Standard Gasket \_\_\_\_\_

\*\* Heat Cable: (3) Sided in Frame & Door Bottom

Sweep

**Exterior:**

Smooth: Galv \_\_\_\_\_ White \_\_\_\_\_ SS \_\_\_\_\_

Stucco: Galvalume \_\_\_\_\_ White \_\_\_\_\_ Alum \_\_\_\_\_

**Interior:**

Smooth: Galv \_\_\_\_\_ White \_\_\_\_\_ SS \_\_\_\_\_

Stucco: Galvalume \_\_\_\_\_ White \_\_\_\_\_ Alum \_\_\_\_\_

**SPECIAL NOTES/INSTRUCTIONS:** \_\_\_\_\_

**HARDWARE:**

Hinges ( ) \_\_\_\_\_

**SPECIAL OPTIONS:**

Backup Header & Casings \_\_\_\_\_

Return Jamb \_\_\_\_\_ Wall Thickness \_\_\_\_\_

Kick Plates:

Exterior: Alum \_\_\_\_\_ SS \_\_\_\_\_

Interior: Alum \_\_\_\_\_ SS \_\_\_\_\_

View Window:

Non-Heated \_\_\_\_\_ Heated \_\_\_\_\_

14 X 14 \_\_\_\_\_ 14 X 24 \_\_\_\_\_

**ELECTRIC OPERATORS:**

Power Source Voltage \_\_\_\_\_

Power Requirement: 230v/1/60

Control Stations:

2 (1-Button Switch Std) Add. Switches: (Qty) \_\_\_\_\_

Remote Control \_\_\_\_\_ Add. Remotes: (Qty) \_\_\_\_\_

Motion Detector \_\_\_\_\_