




Job Number \_\_\_\_\_  
 Job Name \_\_\_\_\_  
 Date \_\_\_\_/\_\_\_\_/\_\_\_\_  
 Quantity \_\_\_\_\_  
 Serial Number \_\_\_\_\_

## Right Hinge Extruded Aluminum Casing Frame Only

With High Sill

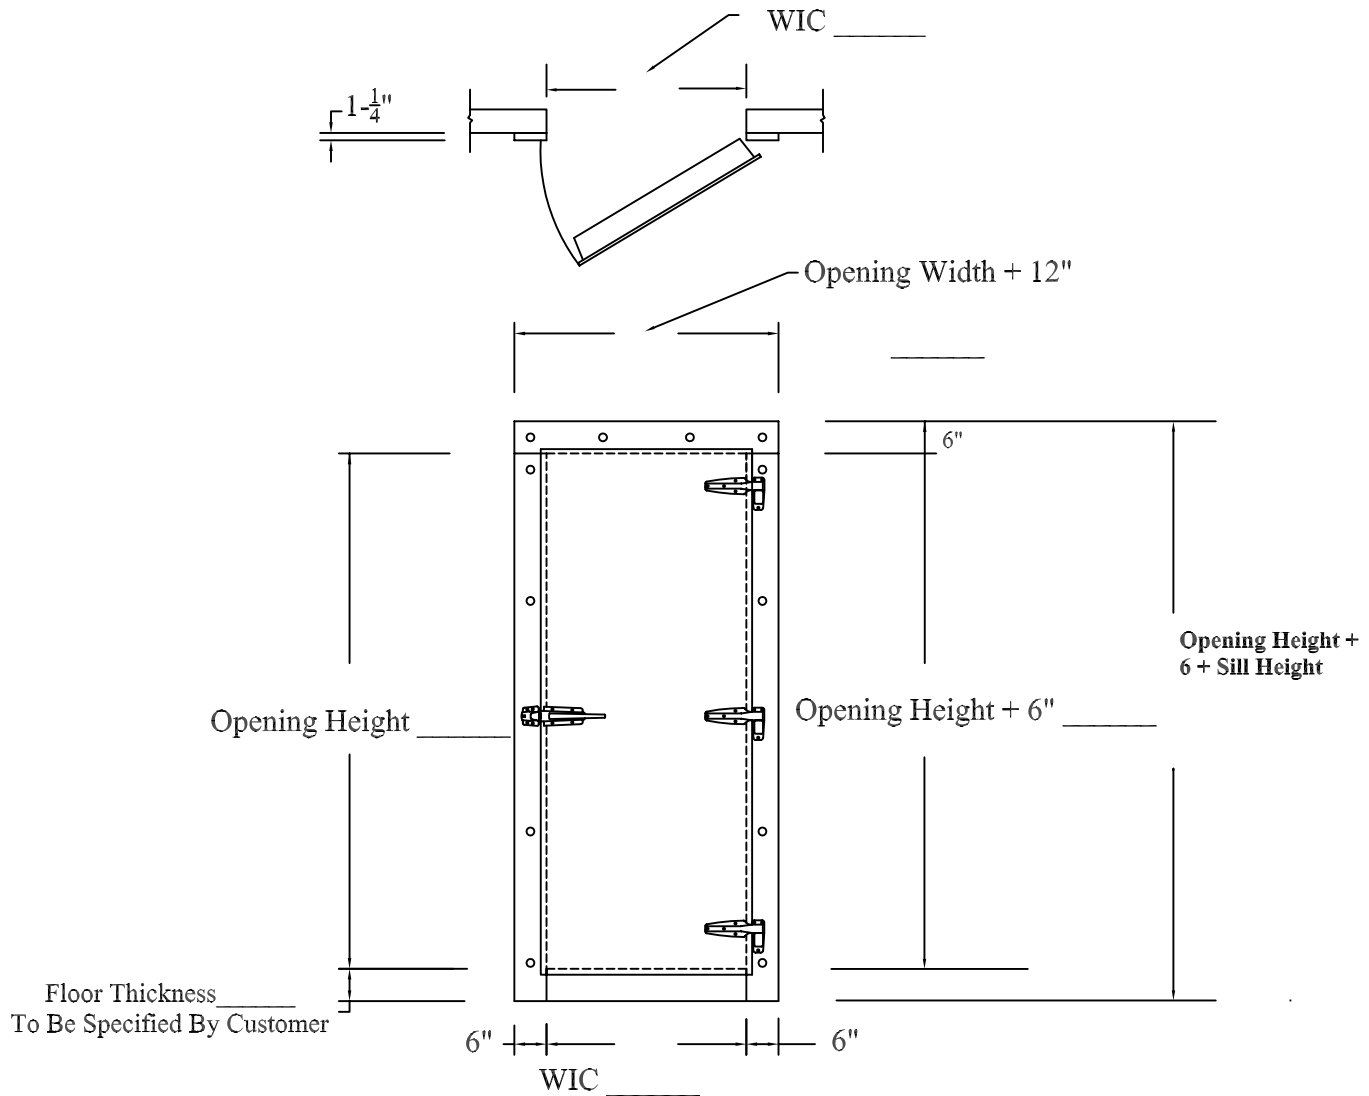

NET OPENING: Width \_\_\_\_\_ Height \_\_\_\_\_

### FEATURES:

Cooler \_\_\_\_\_ Freezer \_\_\_\_\_ \*  
 Temperature \_\_\_\_\_ °F  
 Standard Gasket \_\_\_\_\_  
 \*Heat Cable: (4) Sided in Frame

### FINISH:

#### Exterior:

Smooth: Galv \_\_\_\_\_ White \_\_\_\_\_ SS \_\_\_\_\_  
 Stucco: \_\_\_\_\_  
 Galvalume \_\_\_\_\_ White \_\_\_\_\_ Alum \_\_\_\_\_  
 Other: \_\_\_\_\_

#### Interior:

Smooth: Galv \_\_\_\_\_ White \_\_\_\_\_ SS \_\_\_\_\_  
 Stucco: \_\_\_\_\_  
 Galvalume \_\_\_\_\_ White \_\_\_\_\_ Alum \_\_\_\_\_  
 Other: \_\_\_\_\_

### HARDWARE:

Hinges ( ) \_\_\_\_\_  
 Latch/Strike \_\_\_\_\_ Cyl. Lock \_\_\_\_\_  
 Inside Release \_\_\_\_\_ Closer \_\_\_\_\_  
 Panic Hardware \_\_\_\_\_

### SPECIAL OPTIONS:

Backup Header & Casings \_\_\_\_\_  
 Return Jambs \_\_\_\_\_ Wall Thickness \_\_\_\_\_  
 Kick Plates:

Exterior: Alum \_\_\_\_\_ SS \_\_\_\_\_  
 Interior: Alum \_\_\_\_\_ SS \_\_\_\_\_

#### View Window:

Non-Heated \_\_\_\_\_ Heated \_\_\_\_\_  
 14 X 14 \_\_\_\_\_ 14 X 24 \_\_\_\_\_

SPECIAL NOTES/INSTRUCTIONS: \_\_\_\_\_