



# ULTRAFREEZE™

## The Ultimate in High Speed Doors

### ► SPEED

UltraFreeze™ opens at up to 100 inches per second.

### ► CONTROLS

Albany's UltraSmart™ Controller is people friendly and extremely intuitive. Control box includes an integrated rotary disconnect standard.

### ► VISIBILITY

Optional 17" X 17" windows available.

### ► PANEL MATERIAL

Two ply monofilament standard with three ply monofilament and vinyl panels optional. Blue and yellow standard.

### ► MAINTENANCE

The self-repairing UltraFreeze™ is designed to be low maintenance and cycle hundreds of thousands of times.

### ► BACSEAL™ WEATHER SEAL

The UltraFreeze™ seal is unmatched. The top header and side frames are sealed tight.

### ► ULTRADEFROST™ SYSTEM

UltraDefrost™ system keeps frost off of the door panel.

### ► WIRELESS SAFETY SYSTEM


Eliminate coil cords with Albany's patent pending wireless safety system.

Albany Door Systems' self-repairing UltraFreeze™ door is designed for high traffic cold storage freezer applications where the need for speed is paramount. When fork-truck traffic is high, door speed is important, climate control is critical and safety concerns are at a premium, Albany's UltraFreeze™ is the solution.



# ULTRAFREEZE™

Albany's self-repairing UltraFreeze™ high speed cold storage doors are tough, built to last, and engineered to cycle hundreds of thousands of times.

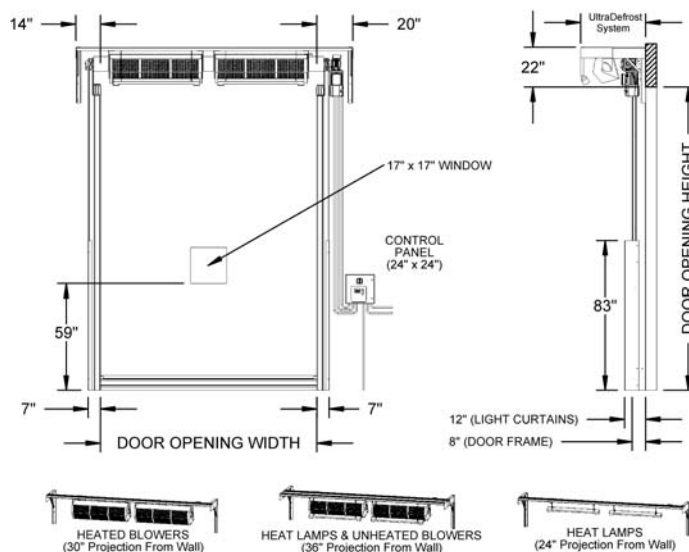

## BacFlap™ Auto-Reset System

When impacted the door panel will automatically reset itself. BacFlaps™ insure against panel tearing.




## BacLight™ Safety System (Optional)

Albany's exclusive safety light barrier projects a curtain of light approximately six feet tall across both sides of the door panel to prevent injuries.



## UltraSmart™ Controller

UltraSmart™ walks you through problems on the control screen. Modular components minimize cost and improve reliability.




## Patent Pending Modular Design

The Albany patent pending extrusion design allows for easy maintenance and repair in the field.



## BacOut™ Safety System (Optional)

Counter-Balance design allows the door to be manually raised in the event of a power failure. No manual cranks in the event of an emergency. Availability depends on door size.



## BacTrack™ Soft Bottom Bar (Optional)

Fully padded safety bottom bar that automatically resets after impact. Self-repairing.



## UltraDefrost™ System (Optional)

Optional Light and Blower systems help to keep frost off of the door panel. Door size limitations on Blower and IR Heat Light packages.



## BacSeal™ Weather Seal

Double seal on the back spreader bar and double seal on the front extrusions. When the door is down, the panel is sealed.



## Wireless Safety System

Cut your cord with Albany's patent pending Wireless Safety System and eliminate costly repairs and downtime associated with coil cords.