





= RECOMMENDED FOR MAINTENANCE,
REQUIRED FOR COVERS




TOP VIEW

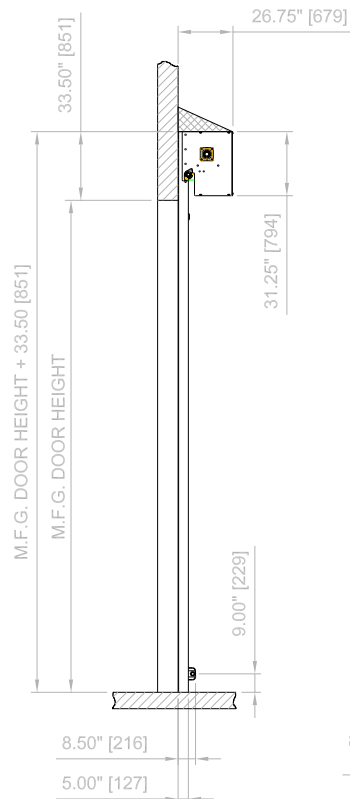


LEFT VIEW

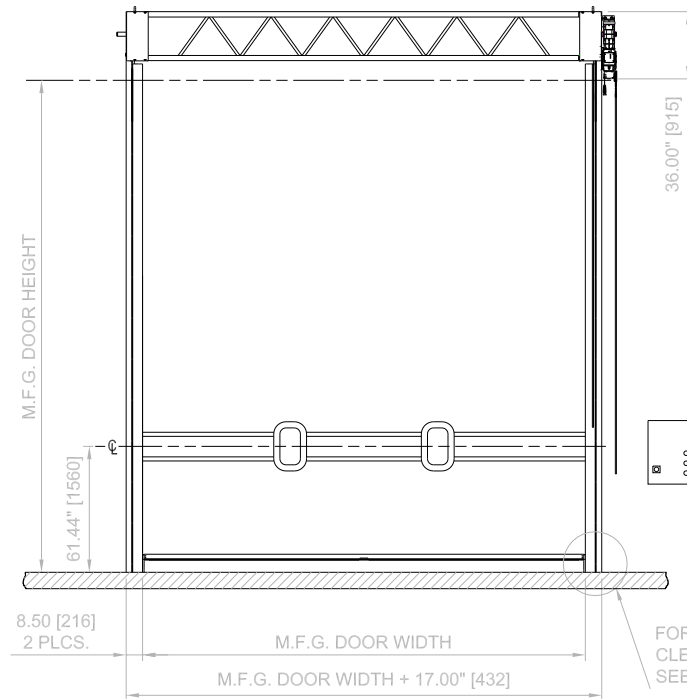

FRONT VIEW

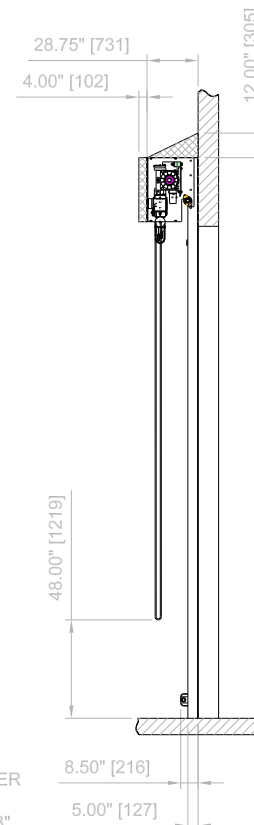

RIGHT VIEW



DETAIL "B"

SPECIFICATIONS & OPTIONS

OPENING SIZE	W=			H=		
MFG. DOOR SIZE	W=			H=		
PRIMARY VOLTAGE	208-240		440-480		575-600	
DRIVE SIDE - (RH / LH)			OPERATOR SPEED (1/2)			
CONTROL PANEL (ACS 50 / PLC)			SPRINGS			NO
			F.R. COVERS (YES / NO)			
WINDBAR (FRONT / REAR / NO)						
WINDOWS (QTY.) DETERMINED BY MFG. DOOR WIDTH						
FABRIC (BLACK SBR / GRAY EPDM / BLUE EPDM)						
DOOR ACTUATORS (QUANTITY)	PUSHBUTTON			<901>		
	PULL SWITCH			<911>		
	FLOOR LOOP			<930>		
	PHOTOCELLS			THRU BEAM		
				REFLECTIVE		
	MOTION DETECTOR			<950>		
	RADIO RECEIVER			<925>		

SPRINGLESS OVER 12'-0" X 12'-0"
UP TO 391 SQ. FT.

(SPEED ZONE #10 #11, #13, AND #14)

CUSTOMER:	APPROVED BY:	ALBANY DOOR SYSTEMS
LOCATION:	APPROVED WITH CHANGES BY:	
SALESMAN / DEALER:	DATE: SCALE = N.T.S.	
	DESCRIPTION:	
	ULTRA TOUGH APPROVAL	
DRAWING NO:	DESIGNER:	DATE:
ULTRA TOUGH-001	J. REITZ	12/07/2007