





TOP VIEW




= RECOMMENDED FOR MAINTENANCE,
REQUIRED FOR COVERS

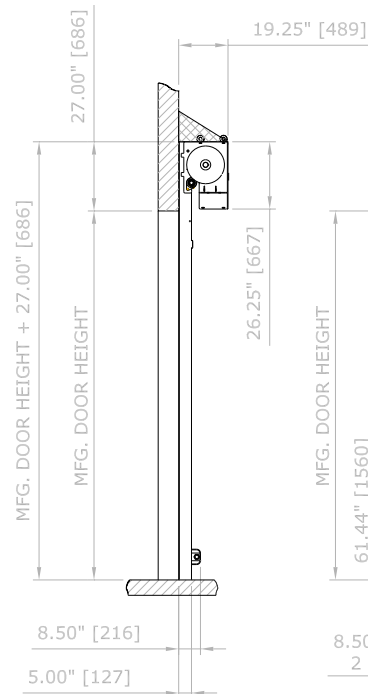


LEFT VIEW

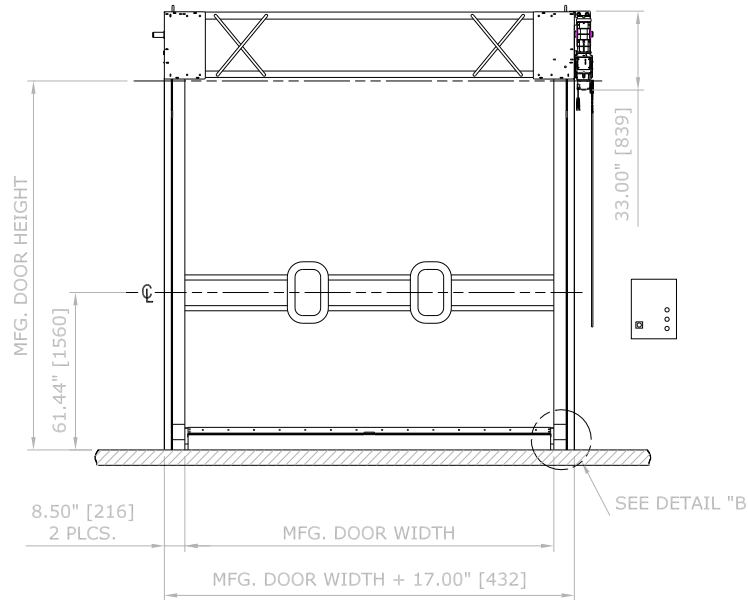

FRONT VIEW

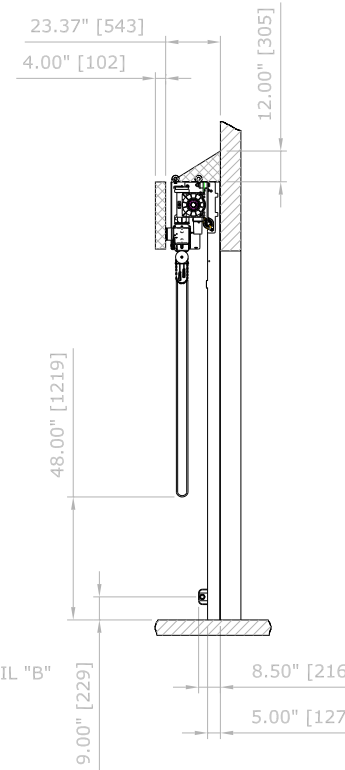

RIGHT VIEW



DETAIL "B"

SPECIFICATIONS & OPTIONS

OPENING SIZE	W=			H=		
MFG. DOOR SIZE	W=			H=		
PRIMARY VOLTAGE	208-240		440-480		575-600	
DRIVE SIDE - (RH / LH)			OPERATOR SPEED (1/2)			
CONTROL PANEL (ACS 50 / PLC)			SPRINGS			NO
			F.R. COVERS (YES / NO)			
WINDBAR (FRONT / REAR / NO)						
WINDOWS (QTY.) DETERMINED BY MFG. DOOR WIDTH						
FABRIC (BLACK SBR / GRAY EPDM / BLUE EPDM)						
DOOR ACTUATORS (QUANTITY)	PUSHBUTTON		<901>			
	PULL SWITCH		<911>			
	FLOOR LOOP		<930>			
	PHOTOCELLS		THRU BEAM <940>			
			REFLECTIVE <941>			
	MOTION DETECTOR		<950>			
	RADIO RECEIVER		<925>			

COMMENTS:

SPRINGLESS UP TO & INCLUDING 12'-0" X 12'-0"

SPEED ZONE #13

CUSTOMER:		APPROVED BY:		
LOCATION:		APPROVED WITH CHANGES BY:		
SALESMAN / DEALER:		DATE: SCALE = N.T.S.		
		DESCRIPTION:		
				ULTRA TOUGH APPROVAL
DRAWING NO:		DESIGNER:		DATE:
ULTRA TOUGH-002		J. REITZ		12/07/2007