

## VERILON® VINYL STRIP WEATHERSEALS

All three types of Verilon® Vinyl Strips are UV stabilized to prevent yellowing and are resistant to most inorganic acids, bases and salts. Plus, they are all GSA approved for federal government purchase.

**CALL YOUR SALES REPRESENTATIVE FOR PRICING.**

### STANDARD STRIP

Available in four thicknesses and widths to meet the needs of light-duty to heavy-duty applications, indoors and outdoors, with an operating temperature of -10F to 140F.

### LOW TEMPERATURE STRIP

Specially fabricated with FDA approved ingredients for use by the food processing industry, this strip helps sustain sub-zero temperatures while remaining flexible from -50F to 140F. This is the only Verilon Vinyl Strip for freezer use.

### WELDING STRIP

For welding booths as well as spraying, grinding and sand blasting enclosures, this strip is fire retardant, highly transparent, noise deadening and prevents near UV and UV radiation from penetrating adjacent areas—blocking over 99% of UV radiation. Meets California Fire Marshall and CPAI-84 requirements for flame resistance (sparks won't burn through), though it is not intended as a substitute for approved eye protection, which should always be worn.

Available in 80-gauge thickness and 8" width in Bronze, Veri-Orange and Blue, or 120-gauge thickness and 12" width in Bronze. Available in flat only.



### USE THE RECOMMENDATIONS BELOW TO HELP YOU DETERMINE PROPER GAUGE, WIDTH AND OVERLAP.

	THICKNESS	WIDTH	OVERLAP
For lightweight traffic closures only, such as conveyor doors (not for exterior openings).	.060"	6"	Full (3")
For freezers, coolers, refrigerated trucks, and personnel doors.	.080"	8"	2"
For interior doors to 10' high. Not recommended for exterior opening.	.080"	8"	Full (4")
For minimum protection for interior/exterior openings from 9' to 14' high.	.120"	12"	4"
For better protection for interior/exterior openings from 9' to 14' high, severe temperature and windy conditions.	.120"	12"	Full (6")
For exterior doors up to 25' high with heavy vehicular traffic.	.160"	16"	4"
For exterior doors up to 25' high with constant heavy-duty equipment traffic. Best for sound control. Not recommended for frequent personnel traffic.	.160"	16"	Full (8")



## STANDARD STRIP DOORS WITH MOUNTING HARDWARE

PART NO.	DOOR OPENING WxH	STRIP WIDTH AND THICKNESS	% OF OVERAP	WEIGHT	PRICE
W0407-08-Z	4' x 7'	8" x .080"	50%	25 lbs	Call
W0408-08-Z	4' x 8'	8" x .080"	50%	26 lbs	Call
W0608-08-Z	6' x 8'	8" x .080"	50%	42 lbs	Call
W0808-08-Z	8' x 8'	8" x .080"	50%	52 lbs	Call
W0808-12-Z	8' x 8'	12" x .120"	66%	98 lbs	Call
W0810-08-Z	8' x 10'	8" x .080"	50%	64 lbs	Call
W0810-12-Z	8' x 10'	12" x .120"	66%	102 lbs	Call
W0910-12-Z	9' x 10'	12" x .120"	66%	127 lbs	Call
W01010-08-Z	10' x 10'	8" x .080"	50%	75 lbs	Call
W1010-12-Z	10' x 10'	12" x .120"	66%	134 lbs	Call
W1212-12-Z	12' x 12'	12" x .120"	66%	174 lbs	Call

## CUSTOM STRIP DOORS WITH MOUNTING HARDWARE

PARTIAL OVERLAP		FULL OVERLAP	
STRIP WIDTH AND THICKNESS	PRICE PER SQ/FT	STRIP WIDTH AND THICKNESS	PRICE PER SQ/FT
8" x .080"	Call	8" x .080"	Call
12" x .120"	Call	12" x .120"	Call
16" x .160"	Call	16" x .160"	Call

\*CUSTOM STRIP DOORS ARE NON-RETURNABLE.


## BULK STRIP DOORS MATERIAL

STRIP WIDTH AND THICKNESS	ROLL SIZE	PRICE PER SQ/FT
6" x .060"	100'	Call
6" x .060"	300'	Call
8" x .080"	300'	Call
12" x .120"	200'	Call
16" x .160"	100'	Call




**VINCL-00-Z**  
Vinyl Door Cleaner and  
Preserver 15 oz can


## NEW UNIVERSAL MOUNT HARDWARE FOR FAST INSTALLATION TO EITHER HEADER OR WALL

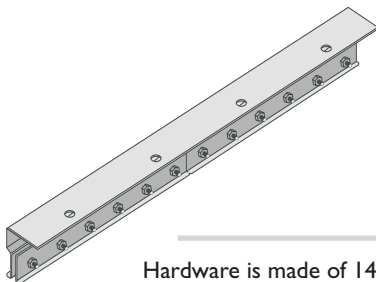

Hardware is made of 14  
gauge galvanized steel with  
mounting bolts pre-studded  
in the bracket



Header Mount bolts inside the door  
frame to the door header (lintel)



Wall Mount bolts to wall